

GRAVIMETRIC DIVERTER VALVES are designed to divert granules, powders and pellets from one way to two ways.

Thanks to two different special executions they are also used for abrasive products and in dairy making DTG2 is an universal valve suitable for all kinds of applications. Thanks to the wide range of accessories, DTG2 can meet all customer's need.



APPLICATIONS

- GRAVIMETRIC DISCHARGE
- POWDER
- GRANULE
- PELLETS
- DIVERTERS
- MOCA - EC1935/2004

DESIGN



- SIZE: DN150, DN200, DN 250
- BODY: CARBON STEEL, ALUMINIUM, SS304 OR SS316L
- FLAP: PAINTED CARBON STEEL, SS304 OR SS316L
- SEAL: TEFLON
- OPERATION: CYLINDER OR MANUAL

FEATURES

- PRESSURE: ATM
- TEMPERATURE: MAX 100 °C
- FLY SWITCH
- RUGGED DESIGN
- LONG LIFE

OPTIONALS

- SPECIAL EXECUTION FOR ABRASIVE PRODUCT
- INNER POLISHED TREATMENT
- MATERIAL ACCORDING WITH EC1935/2004
- VARIOUS CHEMICAL TREATMENT ON BODY/FLAP
- HIGH TEMPERATURE VERSION
- INSPECTION DOOR WITH SAFETY KEY
- INNER CONE FOR FLOWRATE REDUCTION
- SIZE ON REQUEST
- KIT CONNECTING PIPE

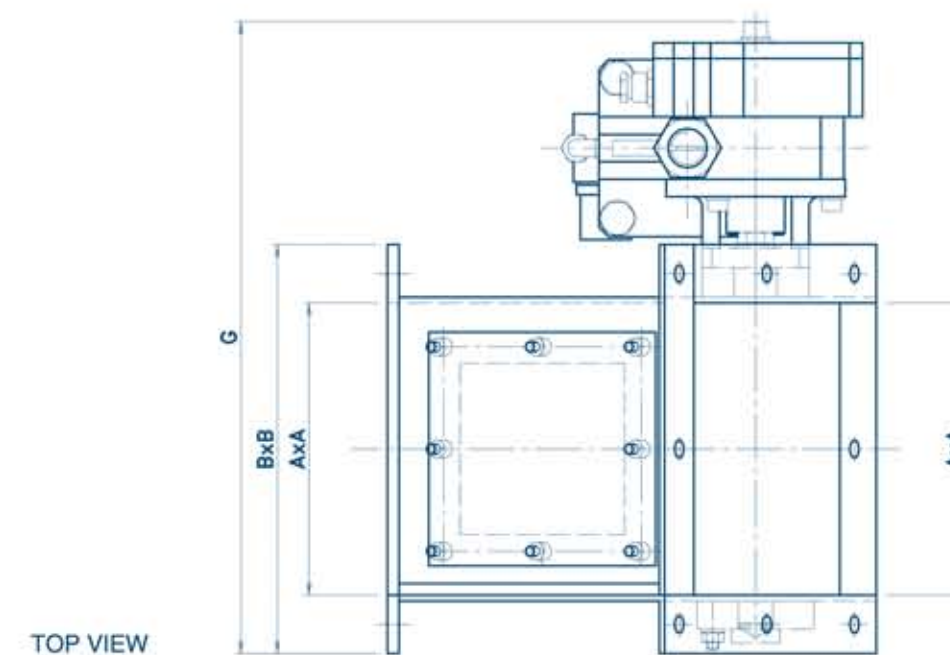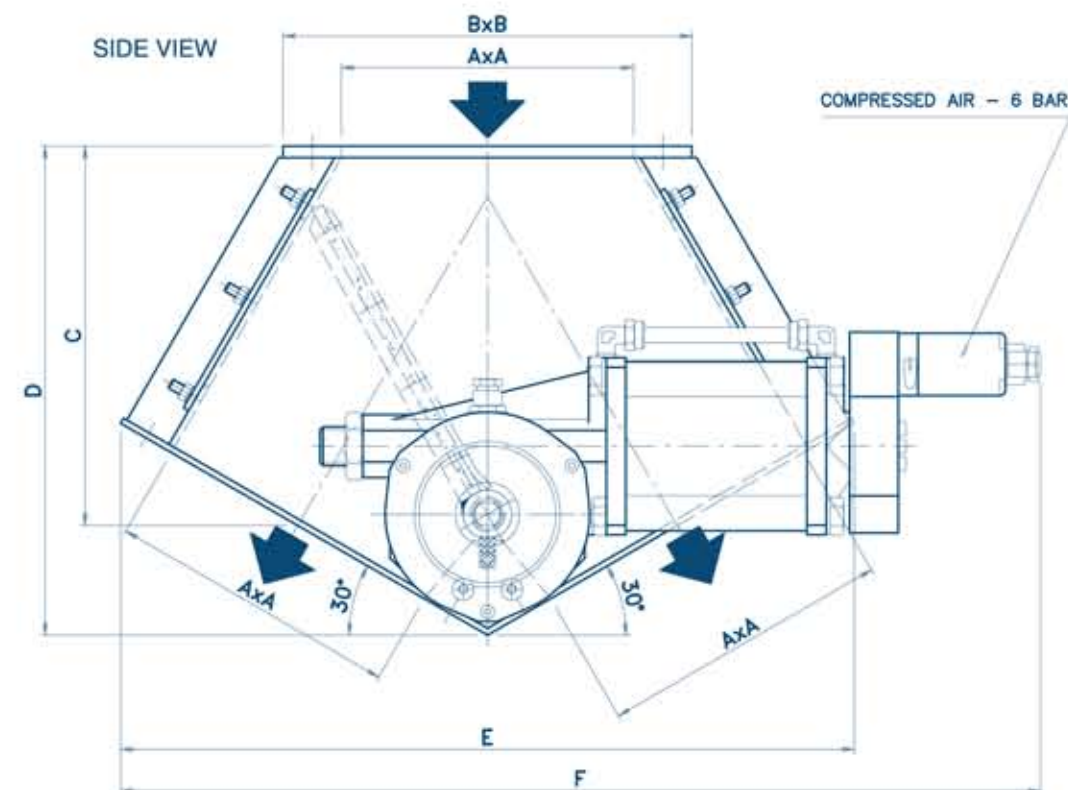

	A	B	C	D	E	F	G	WEIGHT
150	150	210	195	250	375	470	325	Kg -
200	200	266	275	340	480	645	380	Kg -
250	250	316	325	400	565	700	430	Kg -

BROCHURE



COMPLIANCE



II 3D IIC T135°C Dc X